


SD Card Breakout board

BRK-SD

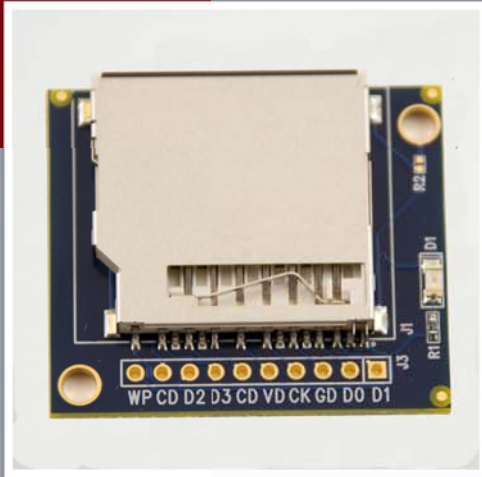

SD Card Con. Type:
Push In - Pull Out

The BRK-SD is a breakout board designed for interfacing standard Secure Digital (SD) Memory Card form factor devices (such as SD Memory Cards, SD Wireless cards, etc.).

LEDs:
Power (GRN)

A standard 0.1" pitch, 10-pin header can be soldered to J3, allowing developers access to the SDIO signals.

Mounting Holes:
Plated through and grounded

The breakout board also features a power LED and grounded mounting holes.

Material:
FR-4, gold plated

PCB Thickness:
0.062" (1.57mm)

Form Factor:
1.3" x 1.5"
(33.02mm x 38.0mm)

Operating Temp:
-20°C to +60°C

Operating Humidity:
5% to 95%
non-condensing

Storage Temp:
-40°C to +70°C

External Connectors:

SD Card Connector J2
0.1" Connector (Not Populated)..... J3

Ordering Information

BRK-SD SD Card Breakout Board
BRK-SD-R Product in retail packaging with UPC/EAN barcode