


Micro USB Breakout board

BRK-uUSB

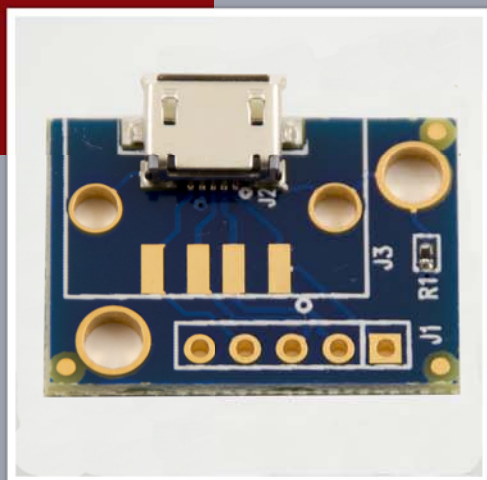

Connector Type:
Micro USB A/B

Mounting Holes:
4-40 Plated through
and grounded

Features:
Grounded Shield

Material:
FR-4, gold plated

PCB Thickness:
0.062" (1.57mm)

Form Factor:
0.64" x 0.90"
(16.26mm x 22.86mm)

Operating Temp:
-20°C to +60°C


Operating Humidity:
5% to 95%
non-condensing

Storage Temp:
-40°C to +70°C

The BRK-uUSB is a breakout board designed for adding a Micro-USB interface to any prototyping or DIY project.

A standard 0.1" pitch, 5-pin header can be soldered to J1, allowing developers access to the USB signals.

The breakout board also features a grounded shield which makes it suitable for applications subject to high frequency noise. Grounded mounting holes allow the board to be mounted and secured easily.

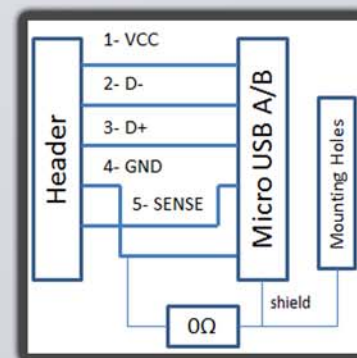

External Connectors:

μUSB Connector J2
0.1" Connector (Not Populated)..... J1

Ordering Information

BRK-uUSB μUSB Breakout Board
BRK-uUSB-R Product in retail packaging with UPC/EAN barcode